




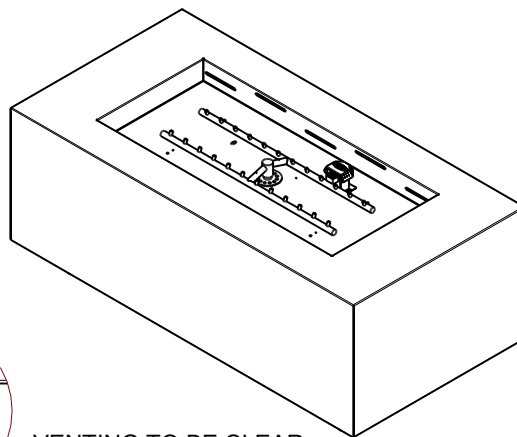

FIRE INSPIRED®

FIRE PIT INSERT CSA CERTIFIED-OUTDOOR USE ONLY
FOR COMMERCIAL AND RESIDENTIAL USE


HEARTH PRODUCTS CONTROLS
2225 LYONS RD.
MIAMISBURG, OH 45342
TOLL FREE: 877.585.9800
PHONE: 937.436.9800
www.hpcfire.com

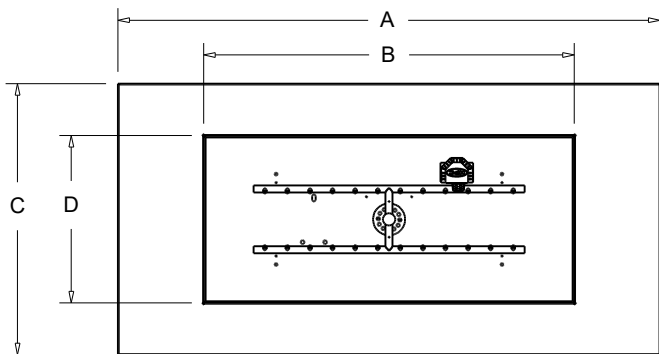

VENTING TO BE CLEAR
OF DEBRIS AND ANY
FINISHING MATERIAL

Detail A

PRE-CUT FOR
FPPK
OR
MLFPK



Detail B

TEJAS SERIES - RECTANGULAR METAL ENCLOSURE

A	B	C	D	E	F
48"	33"	24"	15"	18"	16"

ELECTRONIC IGNITION - ON/OFF

PART NUMBER	BTU	POWER	BURNER
TOR-TEJ48X24-EI	150K	120 VAC OR 24 VAC	TOR-HBSB24

ELECTRONIC IGNITION - HI/LO

PART NUMBER	BTU	POWER	BURNER
TOR-TEJ48X24-EI-HI/LO	150K	120 VAC OR 24 VAC	TOR-HBSB24

PUSH BUTTON/FLAME SENSING (FPPK)

PART NUMBER	BTU	POWER	BURNER
TOR-TEJ48X24-FPPK	150K	AA BATTERY	TOR-HBSB24

MATCH LIT (MLFPK)

PART NUMBER	BTU	POWER	BURNER
TOR-TEJ48X24-MLFPK	65K	-	TOR-HBSB24

INCLUDED:

EI MODELS:

ENCLOSURE, FULLY ASSEMBLED INSERT, INPUT FLEX LINE, REMOTE(HI/LO UNITS ONLY) AND INSTRUCTIONS

FPPK:


ENCLOSURE, FULLY ASSEMBLED INSERT, MOUNTING SLEEVE AND INSTRUCTIONS

MLFPK:

ENCLOSURE, FULLY ASSEMBLED INSERT AND INSTRUCTIONS

NOTES:

1. CONSTRUCTION - .060 MILD STEEL SHEET, POWDER COATED AND WEIGHS 150 LBS.
2. ALL ENCLOSURES INCLUDE FULL OPEN VENTING ALONG BOTTOM. ADEQUATE DRAINAGE IS NEEDED.
2. FOLLOW ALL MANUFACTURER INSTALLATION INSTRUCTIONS AND LOCAL CODES.
3. ALL DIMENSIONS ARE CONSIDERED TRUE AND REFLECT MANUFACTURER'S SPECIFICATIONS AS OF THE REVISION DATE.
4. DO NOT SCALE DRAWING.
5. THESE DRAWINGS ARE FOR SIZING AND PLANNING PURPOSES.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT. THE MANUFACTURER'S RESPONSIBLE FOR THE ACCURACY OF THE DRAWING.



TEJAS SERIES - POWDER COATED METAL ENCLOSURE

RECTANGLE BURNER ENCLOSURE - H-BURNER INSERT